


CAF2 AUTO FLUSH CISTERN 9 LITRE

The 9 litre auto flush stainless steel cistern is made in New Zealand from heavy duty 1.0mm, 304 grade stainless steel.

The CAF2 includes an automatic flushing valve and a 25mm outlet.

Dropper pipe and cistern lid are available as an optional extra.

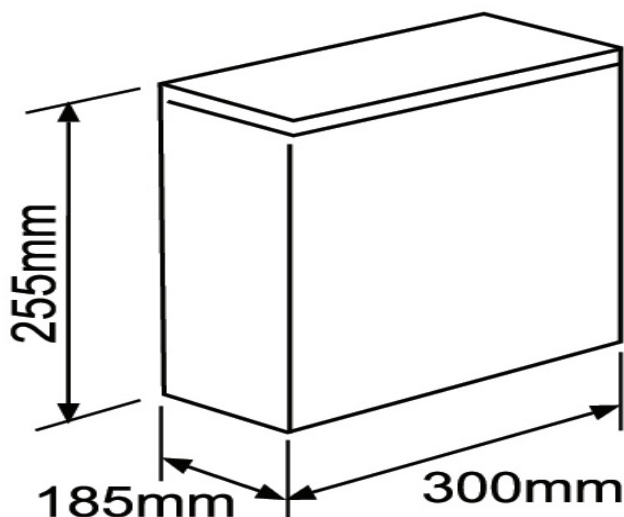

SPECIFICATIONS

Code: CAF2

Overall Size: 255 x 300 x 185mm

Material: Stainless Steel

FEATURES

25mm outlet

Includes automatic flushing valve

Dropper pipe and Cistern lid optional

New Installation Guide

1. Remove any labels from the auto syphon
2. Install the 'Automatic' syphon unit into the cistern, placing one washer over the thread to be positioned on the inside of the cistern shell and the second washer on the outside, then secure into place using the back nut supplied. Do not over tighten the back nut. **DO NOT USE SEALING COMPOUND OR SILICONE**, the rubber washers supplied should provide an adequate seal.
3. Secure cistern at required height and position. (A minimum drop of 1 metre is recommended before any pipe work is branched off).
4. Attach pipe work to syphon tail (down pipe should be one size smaller than the outlet) with suitable connectors, ensuring that there is no backflow or areas where water could 'well' within the installation (water should drain to spreader). **FLEXIBLE HOSES SHOULD NOT BE USED.**
5. To initially 'charge' the syphon, turn the water on and 'fast fill' the cistern using a suitable 'adjustable' flow filling device such as a 'needle valve' until the automatic syphon discharges.
6. Adjust the water inlet down to a slow fill to suit the requirements of the installation. This will set how often the syphon will flush.

Replacement Installation Guide

1. Disconnect pipe work and remove the old Auto Syphon
2. Clean the inside of the cistern
3. Check the pipe work and spreaders for blockages and excessive lime scale
4. When all the pipe work and spreaders are clear and cistern is clean follow steps 2 - 6 of the 'New Installation Guide'